
TURBOFARMER P 34.7









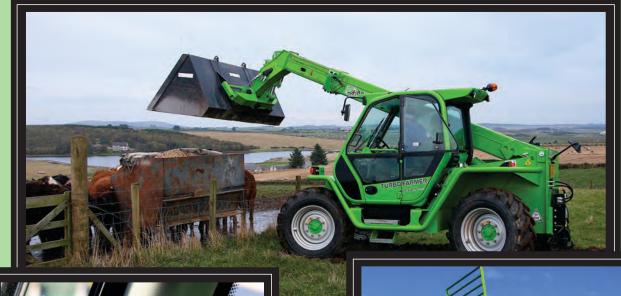







KEY SPECIFICATIONS		
Total weight unladen with forks (kg)	6750	
Maximum load capacity (kg)	3400	
Maximum lift height (m)	6.9	
Maximum forward reach (m)	3.45	
Lift height at maximum capacity (m)	4.7	
Forward reach at maximum load capacity (m)	1.3	
Load capacity at maximum height (kg)	1200	
Load capacity at maximum forward reach (kg)	1200	
Engine (make/number of cylinders)	Deutz/4	
Tier 3 engine power (kW/hp)	74.9/102	
Fuel capacity (I)	150	
Maximum speed (kph)	25	
Hydraulic gear pump (bar-l/min)	210/105	
Hydraulic oil capacity (I)	105	
Electrical circuit (V)	12	
Battery (Ah)	100	
Cab compliant with ROPS/FOPS standards	✓	
4x1 Electro Mechanical joystick controls	✓	
Tac-Lock hydraulic attachment coupling	✓	
Auxiliary boom hydraulics	✓	
Two standard forks (1200mm)	✓	
Hydrostatic transmission	✓	
Finger touch direction control	~	
Inching pedal for precise control	✓	
Permanent 4 wheel drive	✓	
Four wheel steering	✓	
Dry type disc brakes on all wheels	✓	
Automatically locking parking brake	✓	
405/70-24 tyres	✓	
Rear differential lock	<u> </u>	
Four cab working lights (2f & 2r)	✓	
12V electrical on boom head	✓	
Air suspension seat	✓	
Front window protection	•	
Full size cab with air conditioning	✓	
Stability control system	•	

The Merlo TurboFarmer P34.7 is designed for high productivity and versatility in the agricultural environment. The Merlo design gives bigger performance in a smaller lighter machine with added flexibility. The excellent performance in off highway applications, make them ideal for agricultural work. For added productivity, a large range of optional attachments including buckets, crane hooks, winches, jibs and hay bale forks add to the versatility of the P34.7. The flexibility and versatility of telehandlers means they are operational for more hours, giving a higher rate of return. The Merlo TurboFarmer P34.7 can move 3400 kg up to 7m height and travel up to 25 km/h, with the extra benefits of a full size comfort cab. The 3 mode steering adds to the ease of operation. You benefit from easy to use versatile equipment, an increase in efficiency and productivity, and the safest telehandler with 50 years of specialist experience.



DIMENSIONS	
A (mm)	4180
B (mm)	905
C (mm)	2700
D (mm)	570
E (mm)	3865
F (mm)	565
H (mm)	2230
M (mm)	995
P (mm)	2475
R (mm)	3985
S (mm)	4670





merloaustralia.com.au